


COMPULINK PERFORMANCE PLUS FIBER ASSEMBLY
 2 FIBER 2MM DFX ROUND CORDAGE
 UNIBOOT LC TO UNIBOOT LC, OM3 OR OM4, RISER OR PLENUM

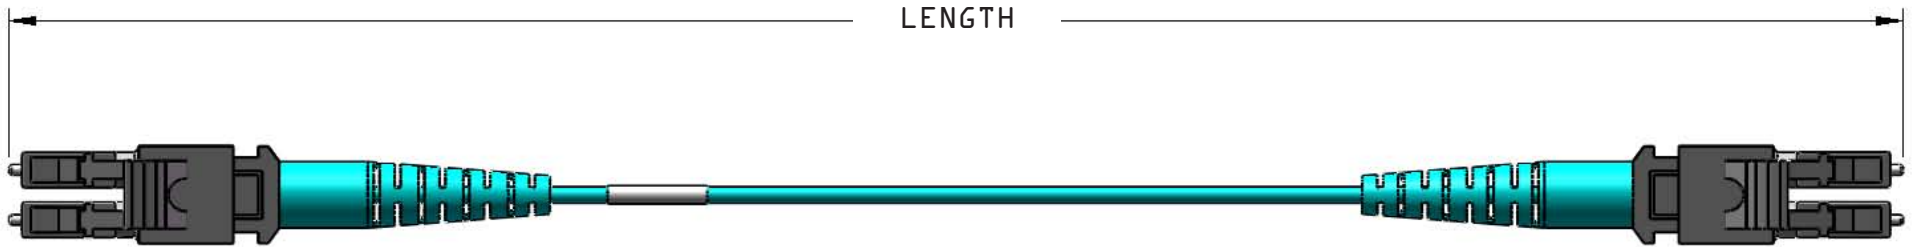

SPECIFICATIONS

| | Multimode 850nm | | Low Loss Multimode 850nm | | | |
|-----------|-----------------|---------|--------------------------|----------------|---------|-------------|
| | Insertion Loss | | Return Loss | Insertion Loss | | Return Loss |
| Connector | Typical | Maximum | Minimum | Typical | Maximum | Minimum |
| LC | 0.10 dB | 0.50 dB | 20 dB | 0.10 dB | 0.15 dB | 20 dB |

Optical Fiber Performance

| | Wavelength (nm) | Maximum Attenuation (dB/km) | Minimum Overfilled Modal Bandwidth (MHz*km) | Minimum Effective Modal Bandwidth (MHz*km) |
|-----|-----------------|-----------------------------|---|--|
| OM3 | 850 | 3.5 | 1500 | 2000 |
| | 1300 | 1.5 | 200 | N/A |
| OM4 | 850 | 3.5 | 3500 | 4700 |
| | 1300 | 1.5 | 500 | N/A |

TOLERANCE

| Cable Overall Length | *Overall Length Tolerance |
|----------------------|---------------------------------|
| 0 - 5.99 inches | + 0.125 inches / - 0.125 inches |
| 6 - 11.99 inches | + 0.25 inches / - 0.25 inches |
| 1 - 2.99 feet | + 2.0 inches / - 1 inches |
| 3 - 14.99 feet | + 6 inches / - 3 inches |
| 15 - 24.99 feet | + 12 inches / - 3 inches |
| 25 - 99.99 feet | + 1 feet / - 9 inches |
| 100 - 199.99 feet | + 1 feet / - 2 feet |
| 200 - 299.99 feet | + 2 feet / - 3 feet |
| 300 - UP feet | + 3 feet / - 5 feet |

*Order length to be Overall Length measured from end face of Connectors.

2 fiber DFX standard is 2mm, offered in ONFR - Riser Rated or ONFP - Plenum Rated.

