


COMPULINK PERFORMANCE PLUS FIBER ASSEMBLY
 12 FIBER, 250µm DATA CENTER STYLE CABLE, PLENUM RATED
 MPO TO MPO, OS2 SINGLEMODE

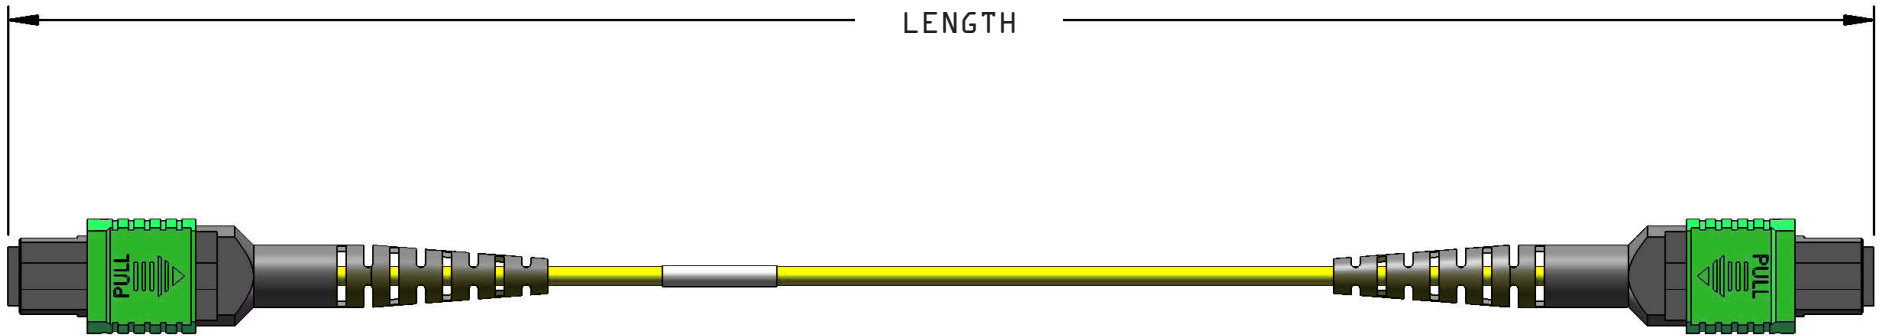

SPECIFICATIONS

Connector	Singlemode		
	Insertion Loss		Return Loss
	Typical	Maximum	Minimum
MPO	0.25 dB	0.75 dB	55 dB

Optical Fiber Performance		
	Wavelength (nm)	Maximum Attenuation (dB/km)
OS2 (ISP)	1310	1.0
	1550	1.0

TOLERANCE

Cable Overall Length feet	Overall Length Tolerance feet (inches)
0.0-10 feet	+0.25 feet, -0.00 (+3 inches,-0.00)
10.1-14 feet	+0.50 feet, -0.00 (+6 inches,-0.00)
14.1-100 feet	+1.00 feet, -0.00 (+12 inches,-0.00)
100.1-999 feet	+2.00 feet, -0.00 (+24 inches,-0.00)

12 strand 250µm Loose Tube Distribution Cable.

12 strand standard will be ONFP - Plenum Rated.

