


COMPULINK PERFORMANCE PLUS FIBER ASSEMBLY  
 2 FIBER 2MM ZIPCORD  
 DUPLEX LC TO DUPLEX SC, OM3 OR OM4, RISER OR PLENUM

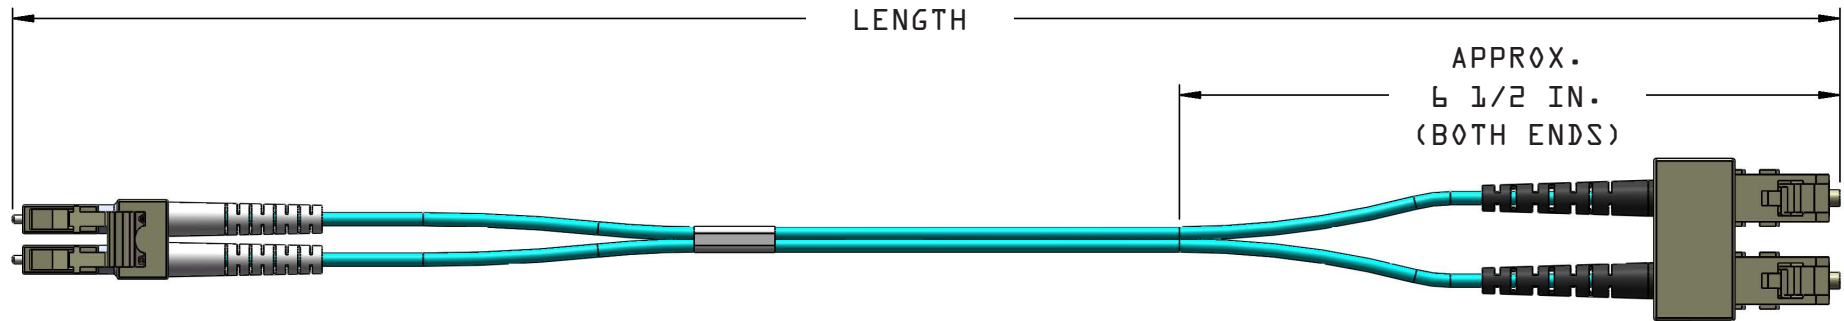

### SPECIFICATIONS

Connector	Multimode 850nm		
	Insertion Loss		Return Loss
	Typical	Maximum	Minimum
LC	0.10 dB	0.50 dB	20 dB
SC	0.30 dB	0.50 dB	20 dB

### TOLERANCE

Cable Overall Length	*Overall Length Tolerance
0 - 5.99 inches	+ 0.125 inches / - 0.125 inches
6 - 11.99 inches	+ 0.25 inches / - 0.25 inches
1 - 2.99 feet	+ 2.0 inches / - 1 inches
3 - 14.99 feet	+ 6 inches / - 3 inches
15 - 24.99 feet	+ 12 inches / - 3 inches
25 - 99.99 feet	+ 1 feet / - 9 inches
100 - 199.99 feet	+ 1 feet / - 2 feet
200 - 299.99 feet	+ 2 feet / - 3 feet
300 - UP feet	+ 3 feet / - 5 feet

### Optical Fiber Performance

	Wavelength (nm)	Maximum Attenuation (dB/km)	Minimum Overfilled Modal Bandwidth (MHz*km)	Minimum Effective Modal Bandwidth (MHz*km)
OM3	850	3.5	1500	2000
	1300	1.5	200	N/A
OM4	850	3.5	3500	4700
	1300	1.5	500	N/A

\*Order length to be Overall Length measured from end face of Connectors.

2 fiber zipcord standard is 2mm, offered in ONFR - Riser Rated or ONFP - Plenum Rated.

