


COMPULINK PERFORMANCE PLUS FIBER ASSEMBLY
 2 FIBER 2MM DFX ROUND CORDAGE
 UNIBOOT LC TO UNIBOOT SC, OS2 SINGLEMODE, RISER OR PLENUM

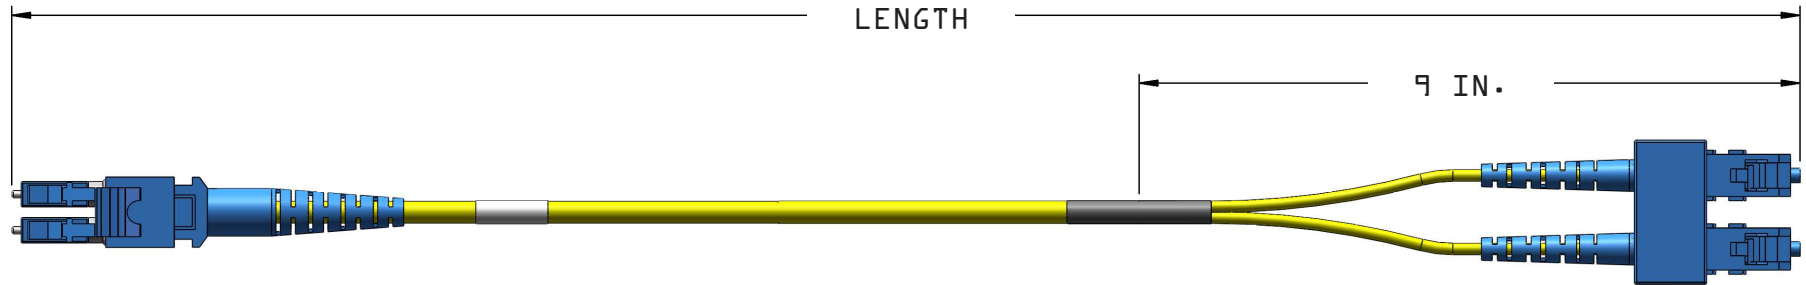

SPECIFICATIONS

	Singlemode		
	Insertion Loss		Return Loss
Connector	Typical	Maximum	Minimum
LC	0.10 dB	0.30 dB	55 dB
SC	0.30 dB	0.40 dB	55 dB

Optical Fiber Performance		
	Wavelength (nm)	Maximum Attenuation (dB/km)
OS2 (ISP)	1310	1.0
	1550	1.0

TOLERANCE

Cable Overall Length	*Overall Length Tolerance
0 - 5.99 inches	+ 0.125 inches / - 0.125 inches
6 - 11.99 inches	+ 0.25 inches / - 0.25 inches
1 - 2.99 feet	+ 2.0 inches / - 1 inches
3 - 14.99 feet	+ 6 inches / - 3 inches
15 - 24.99 feet	+ 12 inches / - 3 inches
25 - 99.99 feet	+ 1 feet / - 9 inches
100 - 199.99 feet	+ 1 feet / - 2 feet
200 - 299.99 feet	+ 2 feet / - 3 feet
300 - UP feet	+ 3 feet / - 5 feet

*Order length to be Overall Length measured from end face of Connectors.

2 fiber DFX standard is 2mm, offered in ONFR - Riser Rated or ONFP - Plenum Rated.

