


COMPULINK PERFORMANCE PLUS FIBER ASSEMBLY  
 2 FIBER 2MM ZIPCORD  
 DUPLEX ST TO DUPLEX ST, BEND-INSENSITIVE OS2 SINGLEMODE†, RISER OR PLENUM

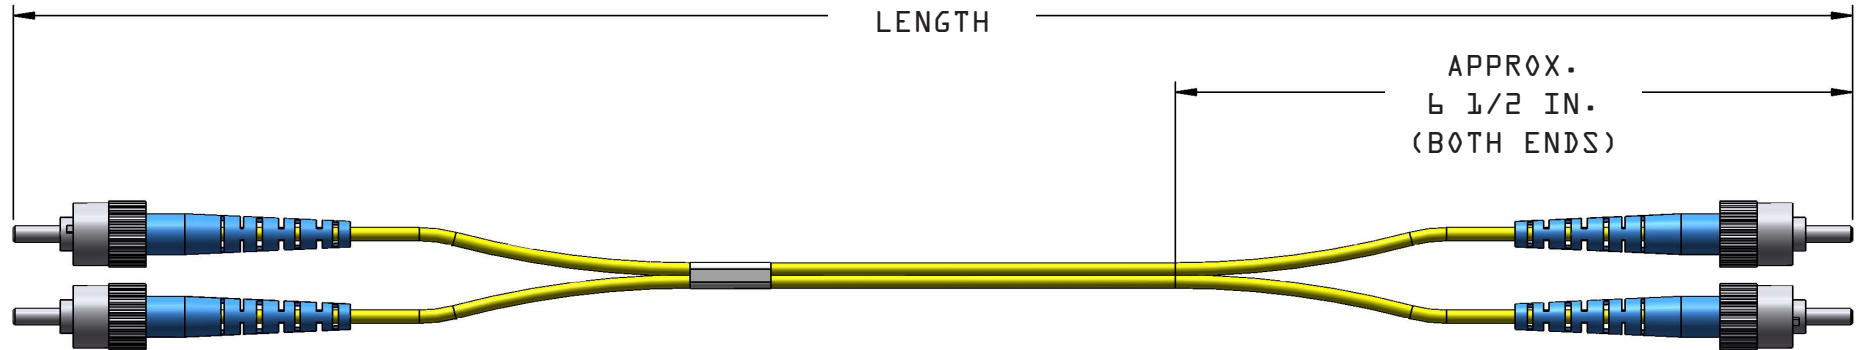

### SPECIFICATIONS

Connector	Singlemode		
	Insertion Loss		Return Loss
	Typical	Maximum	Minimum
ST	0.30 dB	0.40 dB	55 dB

Optical Fiber Performance		
	Wavelength (nm)	Maximum Attenuation (dB/km)
OS2 (ISP)	1310	0.32
	1550	0.18

### TOLERANCE

Cable Overall Length	*Overall Length Tolerance
0 - 5.99 inches	+ 0.125 inches / - 0.125 inches
6 - 11.99 inches	+ 0.25 inches / - 0.25 inches
1 - 2.99 feet	+ 2.0 inches / - 1 inches
3 - 14.99 feet	+ 6 inches / - 3 inches
15 - 24.99 feet	+ 12 inches / - 3 inches
25 - 99.99 feet	+ 1 feet / - 9 inches
100 - 199.99 feet	+ 1 feet / - 2 feet
200 - 299.99 feet	+ 2 feet / - 3 feet
300 - UP feet	+ 3 feet / - 5 feet

\*Order length to be Overall Length measured from end face of Connectors.  
 †Corning SMF-28 ULTRA fiber, with 10mm minimum bend radius per ITU-T G.657.A1.  
 2 fiber zipcord standard is 2mm, offered in ONFR - Riser Rated or ONFP - Plenum Rated.

